



EDITION 2021



Mitco Weld Products Pvt. Ltd.
A-97, Mangolpuri Industrial Area,
Phase-II, Delhi - 110 034 (India)

- info@arconweldindia.com
- arcon@arconweldindia.com
- www.arconweldindia.com

Design and Specifications are subject to change without notice owing to continuous product upgradation.

ARCON is a registered trademark of Mitco Weld Products Pvt. Ltd.

Copyright © **ARCON** All rights reserved. Any unauthorized reproduction or use of logos, images or design elements is strictly prohibited by law. No part of the compilation may be reproduced in any manner without written permission.



SCAN TO VISIT WEBSITE





COMPANY PROFILE

**MAKE
— IN —
INDIA**

**BE
VOCAL
— FOR —
LOCAL**

'ARCON' group of companies, a New Delhi based company, is a manufacturer of a wide range of welding, cutting and safety products which are unbeatable in quality or any other assessments. Our aim is to provide quality Products at most reasonable prices.

Our entire range of products are timely examined under the guidance of visionary professionals who have vast experience in manufacturing these products. Our R&D teams assist us to keep on serving superior quality products.

We are in the welding trade since last 43 years. With distributors and technical support offices located at Ahmedabad, Bhatinda (Punjab), Chennai, Delhi, Indore, Jaipur, Kolkata, Panipat, Raipur, Secunderabad, Singrauli and Nagpur and a number of dealers all over the Country, 'ARCON' group of companies is the leading supplier of a wide range of welding, cutting & safety products in India.

We hope that we may continue to rely on your warm support and guidance in order to serve you better.

WHAT IS WELDING

Welding is a fabrication process that joins material, usually metals or thermoplastics, by causing coalescence. This is often done by melting the work pieces and adding a filler material to form a pool of molten material (the weld puddle) that cools to become a strong joint, but sometimes pressure is used in conjunction with heat, or by itself, to produce the weld. This is in contrast with soldering and brazing, which involve melting a lower-melting-point material between the work pieces to form a bond between them without melting the work pieces.

Many different energy sources can be used for welding including a gas flame, an electric arc, a laser, an electron beam, friction, and ultrasound.

Today welding is used in diverse areas of industry ranging from aircraft and rocket engines to small pipes.

The AWS definition for a welding process is "a material joining process which produces coalescence of materials by heating them to suitable temperatures with or without the application of pressure or by the application of pressure alone and with or without the use of filler material". AWS has grouped the processes together according to the "mode of energy transfer" as the primary consideration. A secondary factor is the "influence of capillary attraction in effecting distribution of filler metal" in the joint. Capillary attraction distinguishes the welding processes grouped under "Brazing" and "Soldering" from "Arc Welding", "Gas Welding", "Resistance Welding", "Solid State Welding", and other processes.

TABLE OF CONTENTS

WELDING CONSUMABLES - GROUP 1

Aluminium & Aluminium Alloy TIG/MIG Rods and Wires	6
Stainless Steel TIG/MIG Rods & Wires	7
Mild Steel (MS) TIG/MIG Rods & Wires	8
Submerged Arc Welding (SAW) Wire	8

GAS WELDING & CUTTING EQUIPMENTS - GROUP 2

Pressure Regulators	10 & 11
Gas Cutter and Nozzles	12
Pug Cutting Machine	13
Heating Torches	14
Welding Torch and CO2 Assembly	15
Rubber Hose for Welding	16 & 17
Hose Connectors	17
NRV / FBA, Two-Way Valve, Long Barrel	18
Torch, Cylinder Pressure Tester & Gas Manifold System	

ELECTRIC WELDING ACCESSORIES - GROUP 3

Flexible Welding Cables	20
Welding Electrode Holders, Earth Clamp & Cable Connector	21
Welding Electrode/ Flux Drying Ovens	22 & 23
Leather Safety Products	24 & 25
Welders' Helmet, Goggles, Hand Shields, Wire Brush & Chipping Hammer	26
MIG Welding Torch & TIG Welding Torch	27
PVC Welding Torch	28

WELDING POWER SOURCES - GROUP 4

Inverter Based Rectifier for MIG and Electrode Welding	30
--	----

INDUSTRIAL SAFETY PRODUCTS - GROUP 5

Safety Helmet & Face Shield	32
Safety Belt and Harness & Lanyard	33
Safety Shoes	34



NOTES

A series of horizontal dotted lines for taking notes, spanning the width of the left side of the page.



GROUP

1


WELDING CONSUMABLES



TIG / MIG WELDING CONSUMABLES

TIG / MIG RODS & WIRES
FOR ALUMINIUM, STAINLESS STEEL &
LOW ALLOY STEEL

- Hydrocarbon free
- Clean weld bead profile
- No porosity, no weld cracking
- No black spots

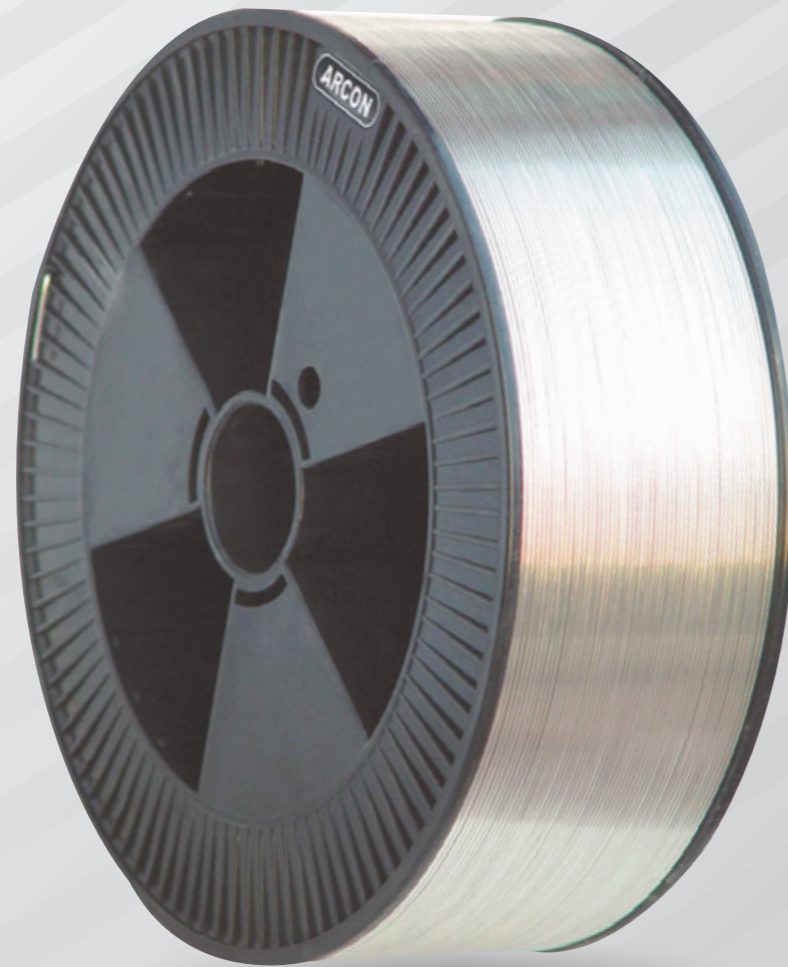


STAINLESS STEEL TIG/MIG RODS AND WIRES

GRADE	C (Max %)	Cr (%)	Ni (%)	Mo (%)
201	0.15	14-16	0.90-1.20	0.30
304L	0.03	18-20	8.0-10.0	--
ER-308L	0.02	19-21	9.5-11.0	--
ER-309L	0.03	23-25	12.0-14.0	--
310	0.08	25-28	20.0-22.0	--
316L	0.03	16-18	10.0-14.0	2.0-3.0



ALUMINIUM TIG / MIG RODS & WIRES

DESIGNATION		CU	MG	SI	FE	MN	ZN
OLD	AWS						
G1B	1050	0.04	0.3	0.4	0.05	0.1
NG21	4043	0.1	0.2	4.5-6.0	0.6	0.5	0.2
NG2	4047	0.1	0.2	10-13	0.6	0.5	0.2
NG6	5356	0.1	4.5-5.5	0.6	0.5	0.5	0.2

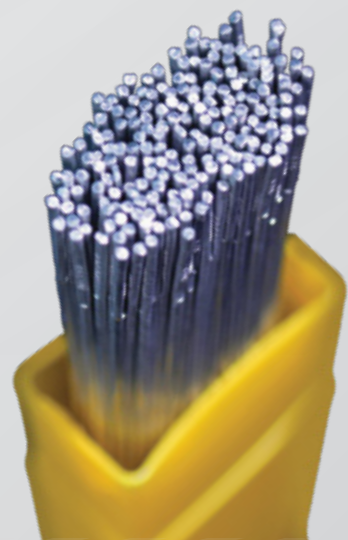

All cut lengths are embossed with grades. Cut lengths are available in plastic boxes containing 5 kg. each. MIG wires are available in plastic spools, 12.5 kg. (approx.) per spool for SS and 6.5 kg. (approx.) per spool for aluminium.



MILD STEEL (MS) TIG / MIG FILLER RODS & WIRES



-  Excellent coating
-  Rust free
-  Low spatters

MILD STEEL (MS) TIG FILLER RODS

GRADE	C (Max %)	Mn (%)	Si (%)	S (Max%)	P (Max %)
70SG	0.10	1.30-1.70	0.40-0.75	0.04	0.03
70S2	0.07	0.9-1.4	0.40-0.70	0.04	0.025

SUBMERGED ARC WELDING (SAW)

MILD STEEL WIRE



-  Excellent coating
-  Rust free
-  Ability to deposit large amounts of metal quickly, consistently and safely
-  Used for welding very large joints



GROUP
2


GAS WELDING & CUTTING EQUIPMENTS



PRESSURE REGULATORS
(FOR INDUSTRIAL GASES)

SINGLE STAGE

Single stage pressure regulators are suitable for cutting, welding and heating processes. In this series, single gauge (showing only inlet pressure) and double gauge (showing both inlet and outlet pressure) regulators are available.

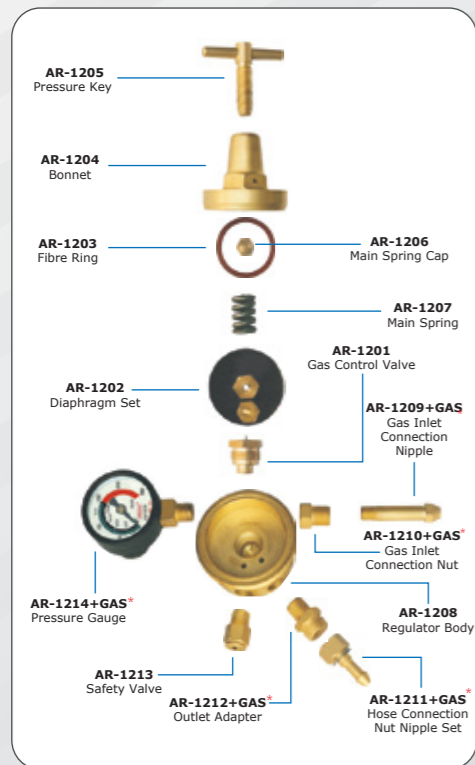

*+Gas indicates that for different gases, spare parts will be different. Other parts are common in the above series.

- Forged brass
- Accurate pressure gauges
- Dual gas filtration
- Maximum constant outlet pressure
- Valuable resource saving



TWO STAGE



LINE GAS REGULATOR



LPG REGULATORS

Available for 22mm & 25mm cylinder valves



MODEL: A-LPG
CODE: ARC - 2013



MODEL: A-1LPG
CODE: ARC - 2015



MODEL: A-2LPG
CODE: ARC - 2014

IS 6901 : 2018
CML-2587977

PRESSURE CHART

GAS	INLET PRESSURE (MAX.)	OUTLET PRESSURE (MAX.)
OXYGEN	250 Bar	16 Bar
DA	40 Bar	2.8 Bar
ARGON	250 Bar	16 Bar
CO ₂	250 Bar	16 Bar
NITROGEN	250 Bar	16 Bar
HYDROGEN	250 Bar	16 Bar
LPG	16 Bar	2.8 Bar

BAR PRESSURE CONVERSION FACTORS

1	bar
14.5038	psi
1.01972	kg/cm²

BRONZE FILTERS

50 Micron	Fitted in Gas Control Valve (AR-1201)	1 No.
-----------	---------------------------------------	-------

HIGH PRESSURE REGULATOR

- Accurate pressure gauges
- Piston design for ease of pressure adjustment
- Temp. tolerance -20 degree celsius to +60 degree celsius
- Inlet leak protection with "O" ring seals
- Outlet pressure upto 100 Bar




MANUAL BLOW PIPES

FOR CUTTING (GAS CUTTER)


Manual Blow Pipes are suitable for cutting of ferrous metals with both oxy.-acty. or oxy.-lpg gas. Only difference for both gases is of cutting nozzles.

REPAIRING KIT

ALL RUBBER WASHERS USED IN CUTTER

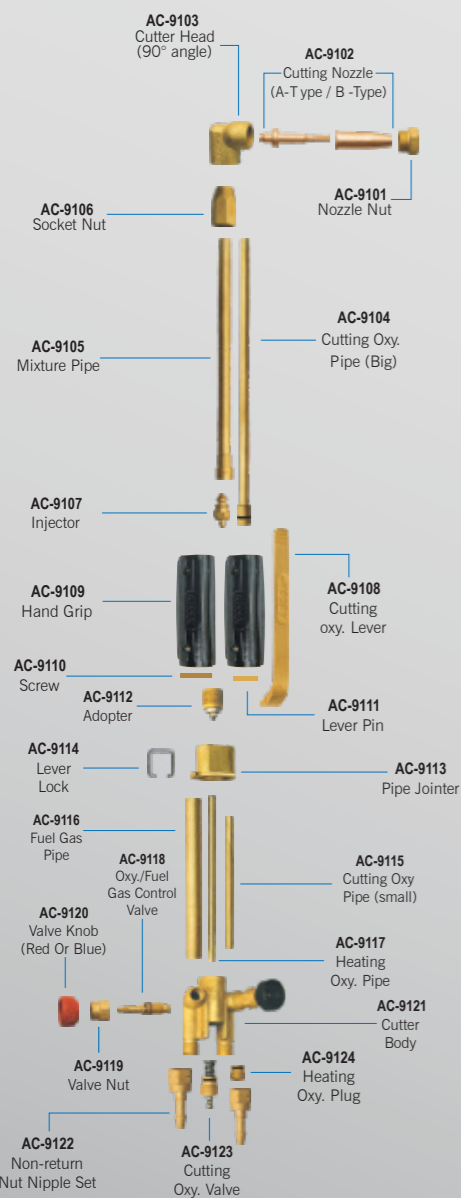

- Full brass construction
- Well balanced
- Back fire resistant
- Ideal mixing of oxy. & fuel gas
- Fine metal cut, less kerf width
- Valuable resource saving

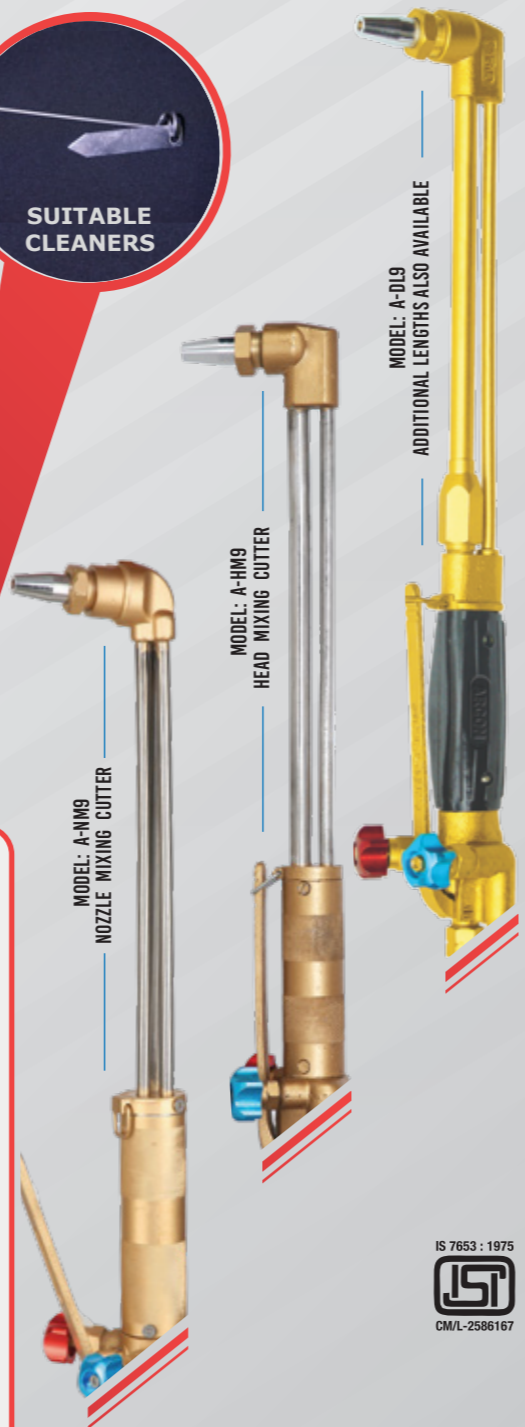

IS 7653 : 1975

 CML-2586167

SEMI-AUTOMATIC PORTABLE CUTTING MACHINE

PUG CUTTING MACHINE

- Rack & slide made of special steel alloy
- Cutting capacity upto 100 mm
- Bevel cut upto 45°
- Minimum vibration thus fine cutting
- Minimum back-fire possibility

KIT	
Pug Cutter	1 No.
Pug Cutter Holder	1 No.
Cutting Nozzle, B-3/64	1 No.
Instructions Manual	1 No.

MODEL: A-PCM/75
 CODE: ARC - 2084








USE FLASHBACK ARRESTOR TO AVOID ACCIDENTS




LOW PRESSURE HEATING TORCH

(LPG HEATING TORCH)

-  Heavy Brass Burners in different sizes
-  Input Gas only LPG
-  Smooth movement of LPG gas
-  Avoid Gas leakage
-  Full brass pipe

• Heating burners are available in 0,1,2,3,4,6 and 10 nos. 2 & 3 no. burners are available with the heating torch.



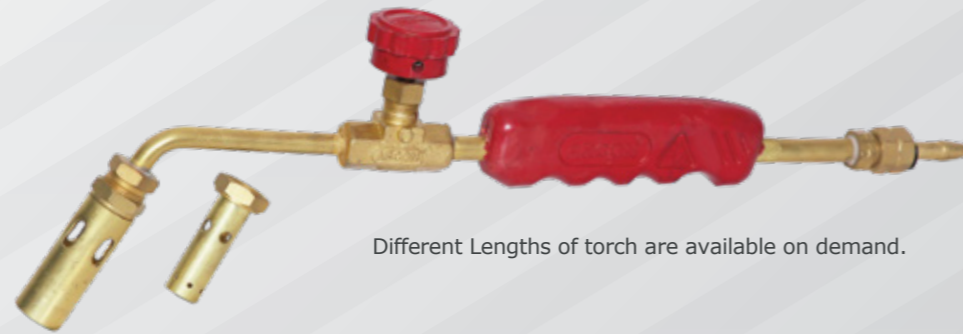

MODEL: A-LPHT
CODE: ARC - 2086



Different Lengths of torch are available on demand.

LOW PRESSURE MANUAL BLOW PIPES

GAS WELDING/BRAZING WITH OXY.-FUEL GAS (WELDING TORCH)

-  Join dissimilar & even non-metals
-  Clean and corrosion resistant joints
-  Cost effective method
-  Full brass construction



MODEL: A-WT
CODE: ARC - 2076



CO₂ ASSEMBLY

FLOW METER FOR ARGON / CO₂
(READING : 0-40 LPM)

MODEL: A-FM CODE: ARC-2074

1. Unbreakable Polycarbonate tube.
2. Body made of forged brass.


CO₂ REGULATOR

1. Special diaphragm which is non reactive to CO₂ gas is used.

CO₂ CONSTANT PRE-HEATER

MODEL: A-CPH/11-22 CODE: ARC-2071

1. Body made of high quality aluminum ensuring maintenance of desired temperature.
2. All parts made of extruded brass rod.

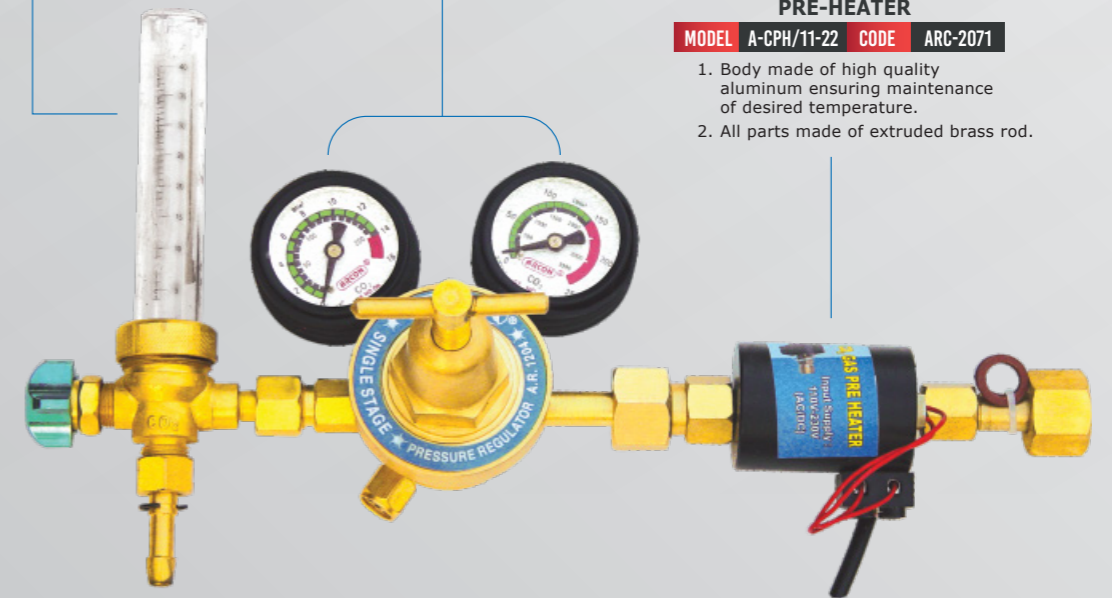

MODEL: A-CCA
CODE: ARC - 2075

HIGH PRESSURE HEATING TORCH

(OXY. / FUEL GAS HEATING TORCH)

Customisation of the product available

MODEL: A-HPHT
CODE: ARC - 2087



SPECIAL HEATING TORCH

FOR FOUNDRY

This torch is specially designed so as to give bigger flame using only LPG gas



MODEL: A-FLHT
CODE: ARC-2095

RUBBER HOSE FOR WELDING

RUBBER HOSE



Rugged and compact construction

Every inch of hose is rigorously tested to ensure no leakage

Available in different sizes as per requirement. red and blue color are available for fuel and oxygen gas respectively.

DURO RUBBER HOSE



Made through a special process which ensure higher bursting pressure and longer life.

No problem of kinking

No deformation even after frequent clamping

THERMOPLASTIC RUBBER (TPR) HOSE



Light in weight and highly flexible

Especially suitable for circular cutting and while working at height


Double braiding ensures appropriate bursting pressure



HOSE CONNECTORS (BRASS)



DUAL /TWIN RUBBER HOSE



Anti-abrasion smooth cover

Weather and ozone resistant cover

Flexible, light weight, less distortion

Here both blue and red hose are joined together hence user need not carry both the pipes separately.

LPG WIRE BRAIDED RUBBER HOSE



Reinforced with firmly & evenly braided high tensile iron wire

Seamless lining & uniform in thickness, smooth in bore & free from porosity

Rugged in design

Rated high on safety parameter scale

TPR HOSE FOR ARGON/CO₂




Highly flexible suitable for shielding gas (like CO₂, Argon)

Available in 6mm ID

No dimension deformation at high temperature

HOSE CRIMPLING

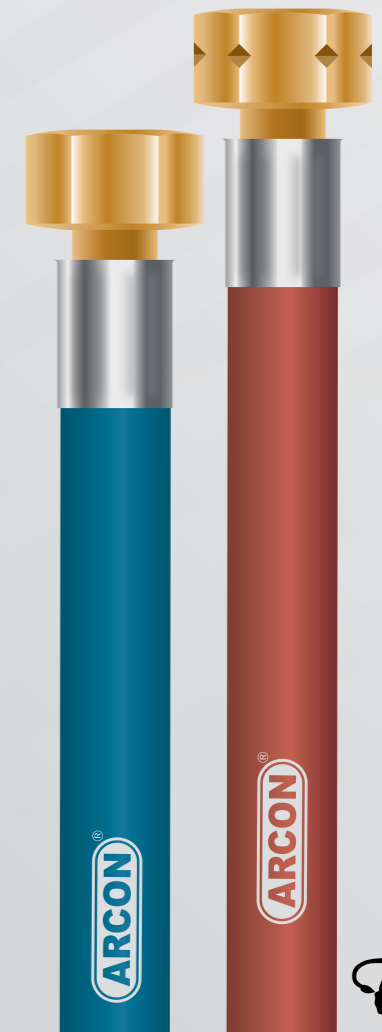

NON RETURN VALVE (NRV) / FLASHBACK ARRESTORS (FBA)



Allows gas to flow in one (right) direction

Breaks the flow of gas in reverse direction

B Full brass connection

Available for Oxy./fuel Gas regulators & torches

LONG BARREL TORCH



GAS CYLINDER PRESSURE TESTER

Highly accurate wika gauge

B Made from extruded brass rod


Available for different gases



MODEL: A-CPT
CODE: ARC - 2081

TWO-WAY VALVE

FOR OXY. / FUEL GAS



Permits two welding/cutting jobs with a gas cylinder

Available for Oxy./fuel gas

CUSTOMISED PRODUCTS



INDUSTRIAL GAS MANIFOLD SYSTEM



ELECTRIC WELDING ACCESSORIES




GROUP 3

FLEXIBLE WELDING CABLES



CABLE CRIMPLING

CABLE PROTECTION SLEEVE (ANTI-SPATTER)

-  Compact (tight) cable
-  Excellent current flow
-  No current leakage



WELDING ELECTRODE HOLDERS

-  Good electrical conductive & optimum hardened jaws to hold even hard wire electrodes
-  Good electrical conductive medium for excellent flow of welding current
-  Both side insulated high tension spring used for excellent electrode grip
-  MM thread bolts for excellent cable grip
-  Available in 200A, 400A, 600A (fully & semi insulated)
-  Light in weight & durable quality for long life

A-TYPE / HEAVY DUTY (600A) / 60%
This model is suitable for heavy duty welding.

A-TYPE

Fully insulated, suitable for adverse welding conditions like ship building or welding in enclosed condition. For example, inside vessels.

B-TYPE

Semi-insulated (for general open shop conditions).



TECHNICAL SPECIFICATIONS

CONDUCTOR AREA (MM ²)	NO. & DIA OF WIRES (MM)	CURRENT RATING MAXIMUM ON 60% DUTY CYCLE (AMPS)		NOMINAL THICKNESS OF COVERING (MM)	MAX. D.C. RESISTANCE OF CONDUCTOR AT 20°C (OHMS/KM)	WEIGHT OF METAL (PER 100 MTRS.)
		HOFR	TRS			
COPPER CONDUCTOR						
16	510/0.2	174	121	2.0	1.210	15.5
25	800/0.2	228	161	2.0	0.780	24.0
35	1114/0.2	285	201	2.0	0.554	33.5
50	708/0.3	360	254	2.2	0.386	48.0
70	999/0.3	454	320	2.4	0.272	67.0
95	1350/0.3	547	386	2.6	0.206	90.5
ALUMINIUM CONDUCTOR						
50	708/0.3	287	200	2.2	0.634	15.0
70	999/0.3	361	253	2.4	0.445	21.0
95	1350/0.3	438	306	2.6	0.334	28.5
120	1702/0.3	522	365	2.8	0.256	34.5

IDEAL WELDING JOB CONNECTION



EARTH CLAMP

Earth Clamps (Return Current Clamps) are suitable for ensuring electrical connection between return current cable and the work piece.

CABLE CONNECTOR

Welding Cable Connectors are suitable to connect any two lengths of flexible welding cable and are suitable to connect flexible welding cable to welding machine also.



RUBBER GRIP SCREW-TYPE

This model is available in 400A & 600A.



WELDING ELECTRODE / FLUX DRYING OVENS

- Durable cabinet construction
- Long life ss heating coil
- Minimum heat loss
- Quick drying electrodes/flux
- Insulation on body to prevent current transfer

PORTABLE OVEN



MODEL: A-HQTS/5
CODE: ARC-3101

STATIONERY OVEN

Double door
(electrode + flux combined)



MODEL: A-CODEF/100
CODE: ARC-3113



TECHNICAL SPECIFICATIONS

MODEL	ELECTRODE CAPACITY	TEMPERATURE CONTROLLER	TEMPERATURE	INPUT SUPPLY	LOAD (INPUT POWER)	INPUT	OVERALL DIMENSION	STORAGE SPACE	NO. OF SHELVES	NO. OF HEATING ELEMENT	EMPTY WEIGHT
MODEL : A-HQTS/2 CODE : ARC-3112	2 kg. (approx.)	Thermostat	50-300°C	230V-AC 50 Hz	500 Watts	2.0 A (approx.)	510mm x 105mm x 210mm	460mm x 50mm x 50mm	One	One	4 kg. (approx.)
MODEL : A-HQTS/5 CODE : ARC-3101	5 kg. (approx.)	Thermostat	50-300°C	230V-AC 50 Hz	500 Watts	2.0 A (approx.)	540mm x 150mm x 290mm	480mm x 70mm x 70mm	One	One	8 kg. (approx.)
MODEL : A-HQD/5 CODE : ARC-3102	5 kg. (approx.)	Digital	50-400°C	230V-AC 50 Hz	500 Watts	2.0 A (approx.)	540mm x 150mm x 290mm	480mm x 70mm x 70mm	One	One	8 kg. (approx.)
MODEL : A-HQ/80V/5 CODE : ARC-3103	5 kg. (approx.)	Constant	150°C	80V-DC	300 Watts	3.5 A (approx.)	540mm x 150mm x 290mm	480mm x 70mm x 70mm	One	One	8 kg. (approx.)
MODEL : A-POTS/10 CODE : ARC-3104	10 kg. (approx.)	Thermostat	50-300°C	230V-AC 50 Hz	1.0 K.W.	4.0 A (approx.)	570mm x 330mm x 550mm	480mm x 140mm x 140mm	Two	Two	22 kg. (approx.)
MODEL : A-POD/10 CODE : ARC-3105	10 kg. (approx.)	Digital	50-400°C	230V-AC 50 Hz	1.0 K.W.	4.0 A (approx.)	570mm x 330mm x 550mm	480mm x 140mm x 140mm	Two	Two	22 kg. (approx.)
MODEL: A-COTS/25 CODE : ARC-3106	25 kg. (approx.)	Thermostat	50-300° C	230V-AC 50 Hz	1.5 K.W.	7.5 A (approx.)	650mm x 485mm x 770mm	480mm x 310mm x 310mm	Five	Three	72 kg. (approx.)
MODEL: A-COD/25 CODE : ARC-3107	25 kg. (approx.)	Digital	50-400°C	230V-AC 50 Hz	1.5 K.W.	7.5 A (approx.)	650mm x 485mm x 770mm	480mm x 310mm x 310mm	Five	Three	72 kg. (approx.)
MODEL: A-COD/50 CODE : ARC-3108	50 kg. (approx.)	Digital	50-400°C	230V-AC 50 Hz	2.0 K.W.	10.0 A (approx.)	640mm x 665mm x 950mm	480mm x 480mm x 480mm	Five	Four	105 kg. (approx.)
MODEL : A-CODF/50 CODE : ARC-3111 (Flux)	50 kg. (approx.)	Digital	50-400°C	230V-AC 50 Hz	3.0 K.W.	15.0 A (approx.)	715mm x 780mm x 1080mm	550mm x 540mm x 540mm	Five	Six	125 kg. (approx.)
MODEL : A-COD/100 CODE : ARC-3109	100 kg. (approx.)	Digital	50-400°C	230V-AC 50 Hz	3.0 K.W.	15.0 A (approx.)	760mm x 980mm x 1300mm	580mm x 710mm x 780mm	Ten	Six	200 kg. (approx.)
MODEL : A-CODF/100 CODE : ARC-3110 (Flux)	100 kg. (approx.)	Digital	50-400°C	230V-AC 50 Hz	3.0 K.W.	15.0 A (approx.)	760mm x 980mm x 1300mm	580mm x 710mm x 780mm	Ten	Six	200 kg. (approx.)
MODEL: A-CODEF/100 CODE: ARC-3113 (Electrode + Flux)	100 kg. (approx.)	Digital	50-400°C	230V-AC 50 Hz	3.0 K.W.	15.0 A (approx.)	760mm x 980mm x 1300mm	580mm x 710mm x 780mm	Ten	Six	200 kg. (approx.)



LEATHER SAFETY PRODUCTS

SPLIT LEATHER HAND GLOVES 14"



CODE ARC-3077-A

TIG WELDING HAND GLOVES 14"



CODE ARC-3077-B

LEATHER APRON (24" X 40")

-  Leather thickness 1.20 to 1.30mm
-  Kelvar thread (Anti-fire) for stitching
-  Leather is tanned by highly superior tanning process in modern tannery

CODE ARC-3079



ARM GUARD 19" (WITH VELCRO STRAP)



CODE ARC-3080

PARA-ARAMID HAND GLOVES 14"
High Temperature (Heat resistant)



CODE ARC-3077-C

UNIVERSAL THUMB HAND GLOVES 14"



CODE ARC-3077-D

LEG GUARD 17"



CODE ARC-3081

MIG WELDING HAND GLOVES 16"



CODE ARC-3077-E

DG GLOVES (25MM)
Extra Soft



CODE ARC-3077-F

CANADIAN HAND GLOVES 10"



CODE ARC-3078

SHOULDER GUARD 30"



CODE ARC-3082

LEATHER JACKET (L,XL & XXL)



CODE ARC-3083

FULL VELCRO LOCK
TWO FLAP POCKET



WELDERS' HELMETS

(WITH CLEAR POLYCARBONATE FILTER COVER)

CODE ARC-3065



Full face to neck protection from welding uv & ir radiations



Interior parts are free from sharp edges for comfortable wear



Window viewing area (97 x 73 mm) for large area view



Dull low-reflective finish



Forehead sweatband absorbs sweat and improves helmet grip



Filter & filter cover size - 108 x 84 mm.

WELDERS' HAND SHIELDS

(WITH CLEAR POLYCARBONATE FILETR COVER)

CODE ARC-3063

Welders' Hand Shields are held in hand and are so designed to give protection to the eyes, ears, face, neck and part of the head of the user during welding and cutting processes.



WELDERS' GOGGLES

(WITH CLEAR POLYCARBONATE FILTER COVER)

CODE ARC-3061

Welders' Goggles are worn over the eyes and held in place by a head band. They are used for protecting the eyes and eye sockets from flying particles and injurious radiations.



WIRE BRUSH

Following are the types of wire brush available:

- Spring Steel - 3 Rows
- Spring Steel - 5 Rows
- Stainless Steel - 3 Rows
- Stainless Steel - 5 Rows



CHIPPING HAMMER

CODE ARC-3072

Chipping Hammers are used by welders for chipping welds & welding slag.



MIG / MAG / GMAW

SEMI-AUTOMATIC WELDING TORCH

MODEL: A-MT/300

CODE: ARC-3211



TECHNICAL SPECIFICATIONS

MODEL	RATING	COOLING METHOD	SUITABILITY	GAS FLOW	WEIGHT WITH 3 MTR. CABLE	CONNECTIONS
MODEL: A-MT/200 PROD. CODE : ARC-3201	200 Amp. at 60% duty cycle	Air cooling	Up to 0.8 mm MIG Wire	10 LPM	2.6 kg. (approx.)	Euro-Central connector
MODEL: A-MT/300 PROD. CODE : ARC-3211	300 Amp. at 60% duty cycle	Air cooling	Up to 1.2 mm MIG Wire	10 LPM	2.9 kg. (approx.)	Euro-Central connector

TIG / GTAW WELDING TORCH

(AIR COOLED)

MODEL: A-TT/300(GC)


CODE: ARC-3301



TECHNICAL SPECIFICATIONS


MODEL	RATING	COOLING METHOD	SUITABILITY	GAS FLOW	CABLE LENGTH	WEIGHT WITH 4 MTR. CABLE
MODEL: A-TT/200(GC) PROD. CODE : ARC-3301	200 Amp. at 60% duty cycle	Gas cooling	Up to 2.4mm Tungsten Electrode	5-10 LPM	4 mtr. (std.)	2.300 kgs. (approx.)
MODEL: A-TT/300(GC) PROD. CODE : ARC-3311	300 Amp. at 60% duty cycle	Gas cooling	Up to 3.0mm Tungsten Electrode	5-10 LPM	4 mtr. (std.)	2.550 kgs. (approx.)



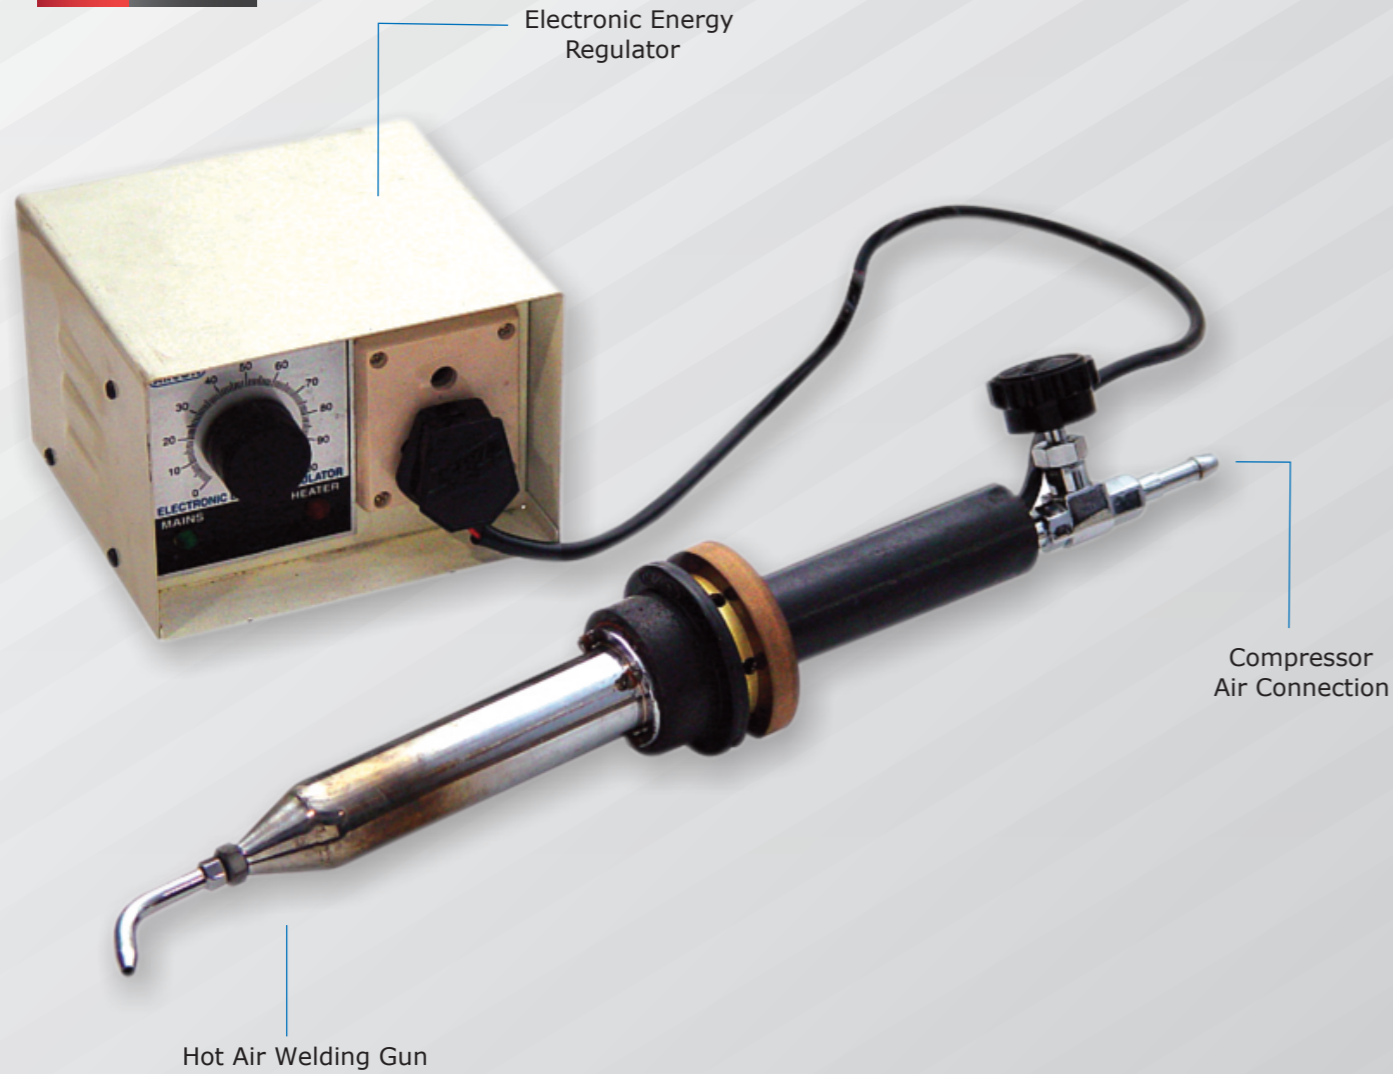

CODE ARC - 3131

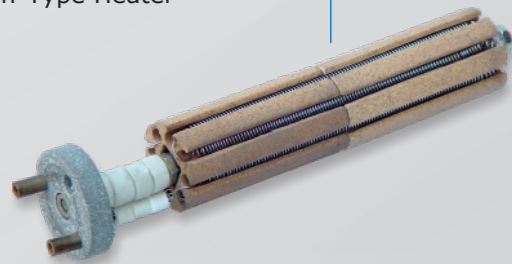

GROUP
4

Plug-in-Type Heater



-  Long life heating coil
-  Handle made of heat resistant material providing protection to hands from heat
-  Brass construction ensuring longer life
-  High quality washers used which ensures no leakage



WELDING POWER SOURCES

INVERTER BASE RECTIFIER

MMAW/ARC WELDING MACHINE (THREE CARD) MOSFET

- Triple Card ensuring best results with maximum life
- Light weight and compact hence very easy to carry
- Suitable for up to 3.15 mm electrode



MODEL NO.	INPUT SUPPLY VOLTAGE	INPUT FREQUENCY	WELDING CURRENT RANGE	MAX OCV	DUTY CYCLE	WEIGHT	APPROX SIZE " W X L X H
A-MMAW/200/1	220-230 V 1 phase	50 Hz	20-200 Amps	60-85	60%	6.0 kgs approx	15 X 6 X 9

MIG + ARC WELDING MACHINE

INSULATED-GATE BIPOLAR TRANSISTOR (IGBT)

- Highly portable because of in-built wire feeder
- Proper cooling mechanism hence better efficiency
- Very easy repair and maintenance
- Suitable for up to 0.8 mm Mig wire



MODEL NO.	INPUT SUPPLY VOLTAGE	INPUT FREQUENCY	WELDING CURRENT RANGE	MAX OCV	DUTY CYCLE	WEIGHT	APPROX SIZE " W X L X H
A-IME/250/3	380/415 3 Phase	50 Hz	25-250 Amps	50-60	60%	20 kgs approx	11 X 20 X 16
A-IME/250/1	220-230 V 1 Phase	50 Hz	25-250 Amps	50-60	60%	20 kgs approx	11 X 20 X 16



GROUP

5

INDUSTRIAL SAFETY PRODUCTS

SAFETY HELMET



-  Rigid and sturdy
-  Resists penetration
-  Absorbs shock of blow
-  Easy turning ratchet knob
-  Very comfortable to wear

IS 2925 : 1984

 CMIL-S10008080E

INDUSTRIAL SAFETY BELT AND HARNESS



FACE SHIELD



STYLE	B-TYPE WITH ELASTIC
CODE	ARC-5052
SIZE	9" X 11"
COLOUR	CLEAR

-  High strength webbing
-  Minimum breaking load of 20 kn of all the parts used in harness ensuring maximum safety
-  Fluorescent color for easy visibility
-  No sharp edges in metal fittings
-  Very comfortable to wear

FALL ARRESTOR



IS 3521 : 1999

 CMIL-3273353

MODEL NO.:
ARC-5151

WEBBING LANYARD



SHOCK ABSORBER

POLYAMIDE ROPE LANYARD



SAFETY SHOES

NOTES

PVC SAFETY SHOES



High quality synthetic leather upper



Skid resistant pvc sole



Heavy Duty Steel Toe ensuring maximum safety



POLO

CODE ARC-5505 TO ARC-5512



RIO

CODE ARC-5525 TO ARC-5531



ZARA

CODE ARC-5545 TO ARC-5551



AERO (HIGH ANKLE)

CODE ARC-5565 TO ARC-5571

PU SAFETY SHOES



Pure leather upper



Injection Molded High Quality PU Sole



Synthetic Lining inside provides maximum comfort



Heavy duty steel toe ensuring maximum safety



VENUS

CODE 5705 TO 5711



ROCK

CODE 5725 TO 5732



VICTORY (HIGH ANKLE)

CODE 5745 TO 5751



ALPHA SUEDE

CODE 5765 TO 5771

